


## Application software for best in class inverter and e-motor control

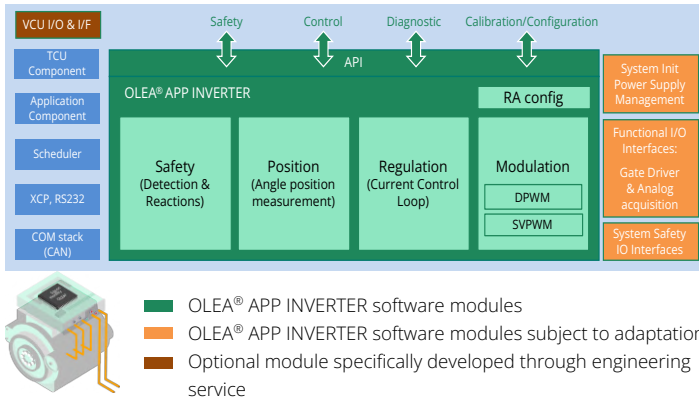

## OLEA® APP - INVERTER

- Software **flexibility** and **modularity** enabling development of **platform**
- **Adaptable** for further differentiation
- State of the art **performance** and **efficiency**
- Short **time to market**
- **ISO 26262 ASIL-C** compliant

## Current and next generations e-powertrains

OLEA® APP - T222 INVERTER is based on the OLEA® T222 FPCU parallel architecture, which allows extremely high-performance, real-time and safe control of advanced power electronics and electric motors.

The application provides efficient and safe torque, speed, current or rotor control using Field Oriented Control (FoC) and variable Space Vector Pulse Width Modulation (SVPWM) algo. The modular software is flexible and can be adapted to a large variety of customer applications, whether Low or High-Voltage systems with PMSM or WRSM. The high controller performance supports not only MOSFET and IGBT power transistors but is also suited for the latest technology SiC or GaN based inverters.

By exploiting the programmable and parallel hardware of the OLEA® T222 FPCU chip, it allows real-time control loops and switching frequencies up to 100 kHz. The application has two independent stacks: one for control and one for the functional safety. They're designed as AUTOSAR Complex Device Drivers including APIs to interface with the RTE bus.

To support customers' developments, the OLEA® APP - T222 INVERTER platform enables a fully integrated model-based design flow along the development cycle, from Model-in-the-Loop through Hardware-in-the-Loop simulations down to calibration and validation thanks to its ASAM standard as the native format.

## Key metrics

Current Control Loop	2-100 kHz
D Current Reponse time	30 ms
Q Current Reponse time	80 ms
Current Ripple	2.5%
Fault rate Reaction Time (FRT)	100 ns
Fault Handling Time Interval	300 ns
Max CPU Load	10%

## Adaptable to any e-powertrain system



Supports **48V to 800V** for HEVs and BEV



**Automotive Qualified**, ASIL-C design ready and AUTOSAR compliant




Any **MOSEFT, IGBT, SiC** or **GaN** based inverters



Support most advanced **measurement** and **calibration tooling**



Support wide variety of **PMSM** and **WRSM** motors



Model based design accessible as **Reference** and **Target Models**

# Fully Featured

## Type of E-motor

- PMSM (Permanent Magnet Synchronous Motor)
- WRSM (Wound Rotor Synchronous Motor)
- Configurable number of pole pairs
- Uniform air gap (Non-salient pole machine):
  - When D/Q inductances are the same ( $L_d=L_q$ )
- Non uniform air gap (Salient pole machine):
  - When D/Q inductances are different ( $L_d \neq L_q$ )
- AFM (Axial Flux Machine)
- RFM (Radial Flux Machine)
- 3 Phase motor with star connection
- 6 Phase motor controlled as two-3 phase star connection motors

## Modulation

- SVPWM (Space Vector Pulse Width Modulation)
- DPWM (Discrete Pulse Width Modulation)
- Variable switching frequency based on the electrical speed
- Dead-time compensation

## Motor Sensor Signal Processing

- Position tracking loop algorithm for SIN/COS signals with a configurable number of e-motor/resolver configurable pole pairs number
- Position sensor phase auto calibration at boot
- Position delta phase LUT calibration update at high speed
- Position gain and offset auto adjustment of SIN/COS ADC
- AMR-GMR

## VCU Interface

- E-motor control FSM supporting the VCU operating states
- Fully featured set of APIs (control, diagnostics, safety, calibration/configuration) allowing integration with a VCU

## E-motor Control

- Flux weakening management
- Active discharge
- FOC (Field Oriented Control) incl.
  - Clarke/Park and Inverse Clarke/park transforms
  - D/Q currents filtering using a MAF (Moving Average Filter)
  - PID coefficient computing with lambda and bandwidth LUT
  - D/Q voltages decoupling
  - D/Q voltages saturation
- D/Q inductances LUT:
  - Fct. of D/Q currents for PMSM
  - Fct. of D/Q currents & rotor excitation current for WRSM
- Torque derating LUT based on Speed/DC-Link and  $T^\circ$
- Slew rate limitation: D/Q currents, switching frequency and rotor DC excitation current (WRSM)
- Filtering of DC voltage, motor speed, measured  $T^\circ$  and rotor DC excitation current (WRSM)
- $T^\circ$  monitoring: filtered and interpolated using 8 post-build configurable LUT
- Torque control:
  - LUT of D/Q Currents based on speed and torque (PMSM)
  - LUT of D/Q Currents and LUT of rotor excitation current based on speed and torque (WRSM)
- Current control
- Speed control
- Rotor control:
  - Enabled automatically for WRSM
  - Rotor current regulator parameters computing
- Clockwise/anti-clockwise direction support


## Safety & Diagnostics

- ISO 26262 ASIL-C certified design ready
- Safety Finite State Machine (FSM) managing the faults containment
- Configurable safety faults detections
- Warning detections: over/under temperature warning


# Key deliverables

- Licensable as object or source code
- Fully featured API for an efficient integration with custom software
- Fast configuration and calibration with OLEA<sup>®</sup> COMPOSER - T222 e-motor GUI
- OLEA<sup>®</sup> T222 FPCU Technical Reference Manual, OLEA<sup>®</sup> COMPOSER – T222 SDK and User's Guides


# Starter Kit for rapid prototyping



OLEA<sup>®</sup> COMPOSER – T222 HVIC  
Starter Kit



SIC INVERTER platform  
with CISSOID



Reference Board for Semikron  
SKAI3<sup>®</sup> Inverter module